

OFM-10

P-CAP




SEYPOS 

Touch Scan Print

OFM-10

IP 65 commercial grade open frame monitor

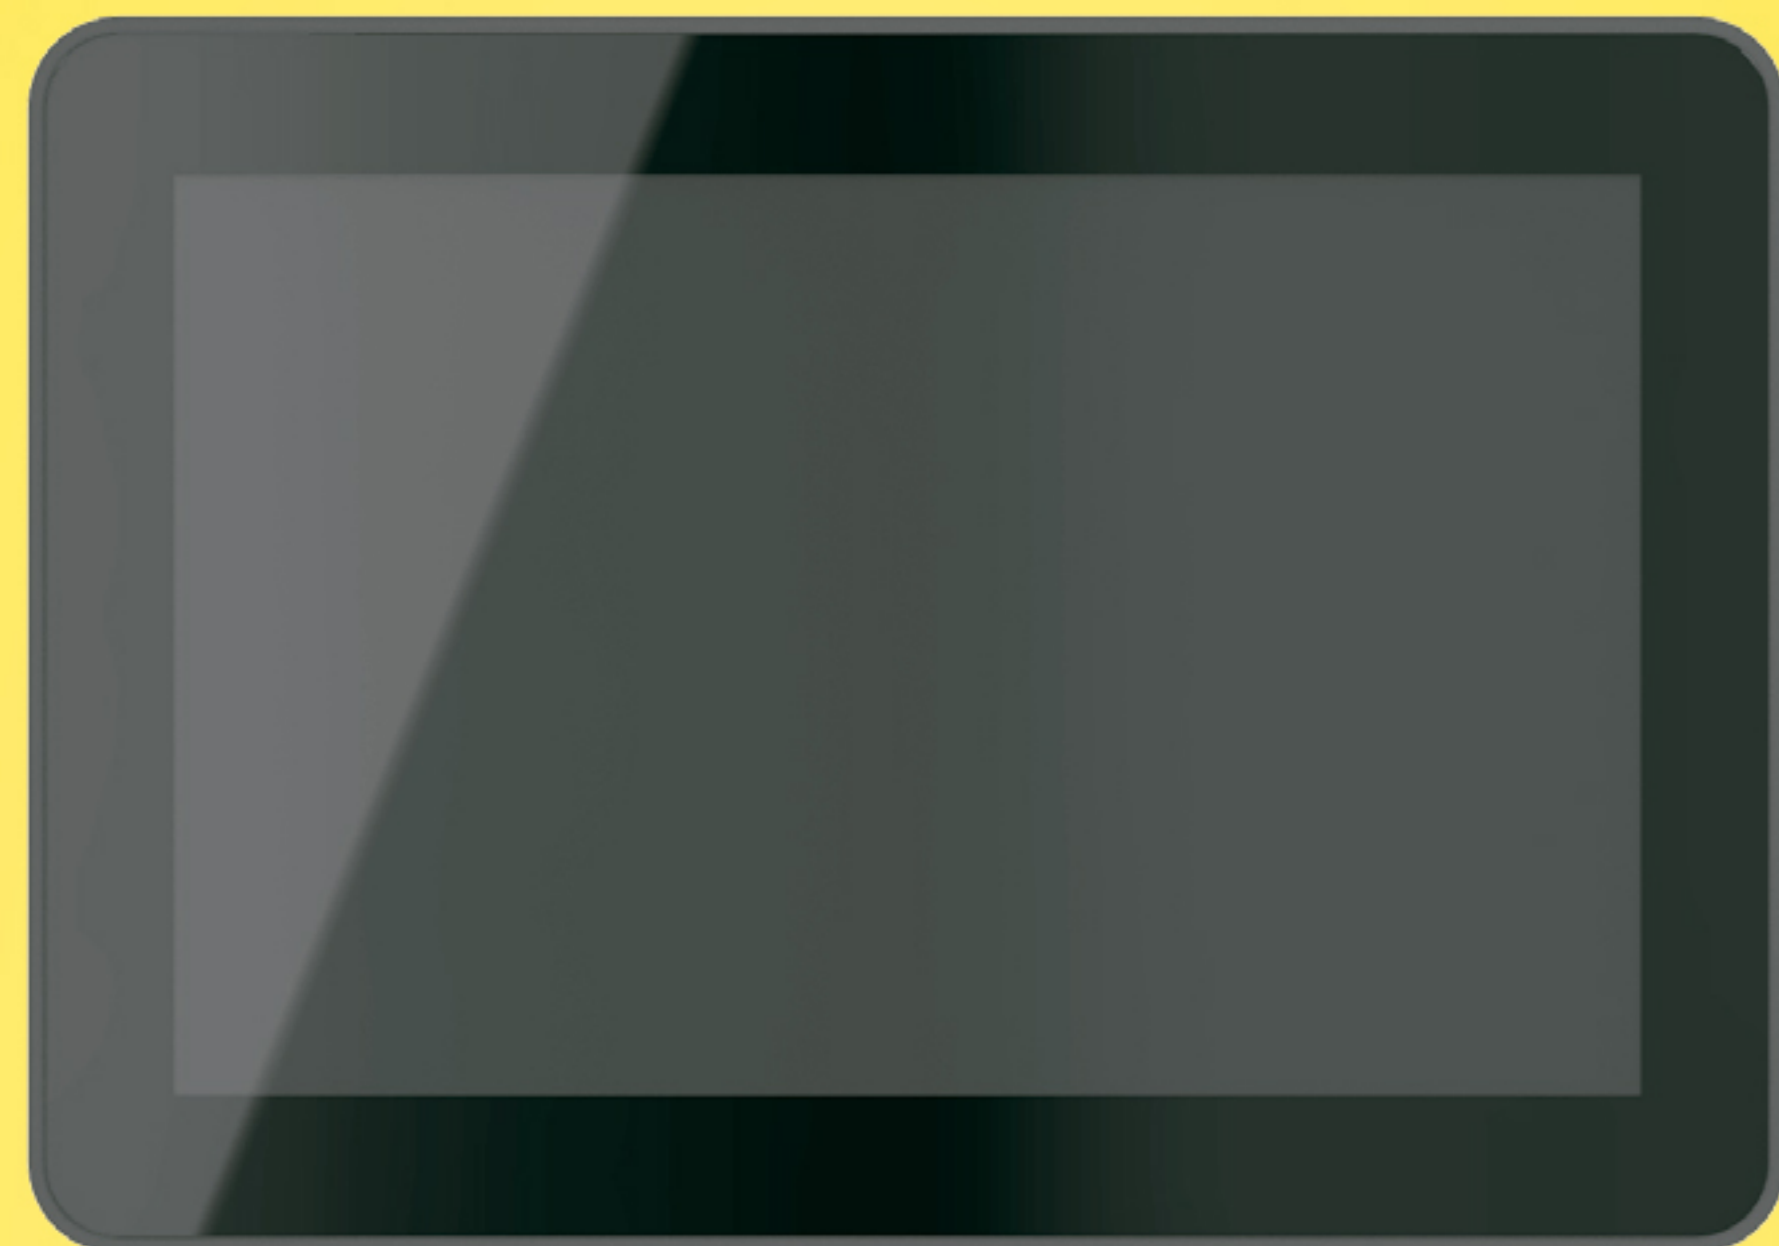

Cable management




Detail




Features

I/O Port

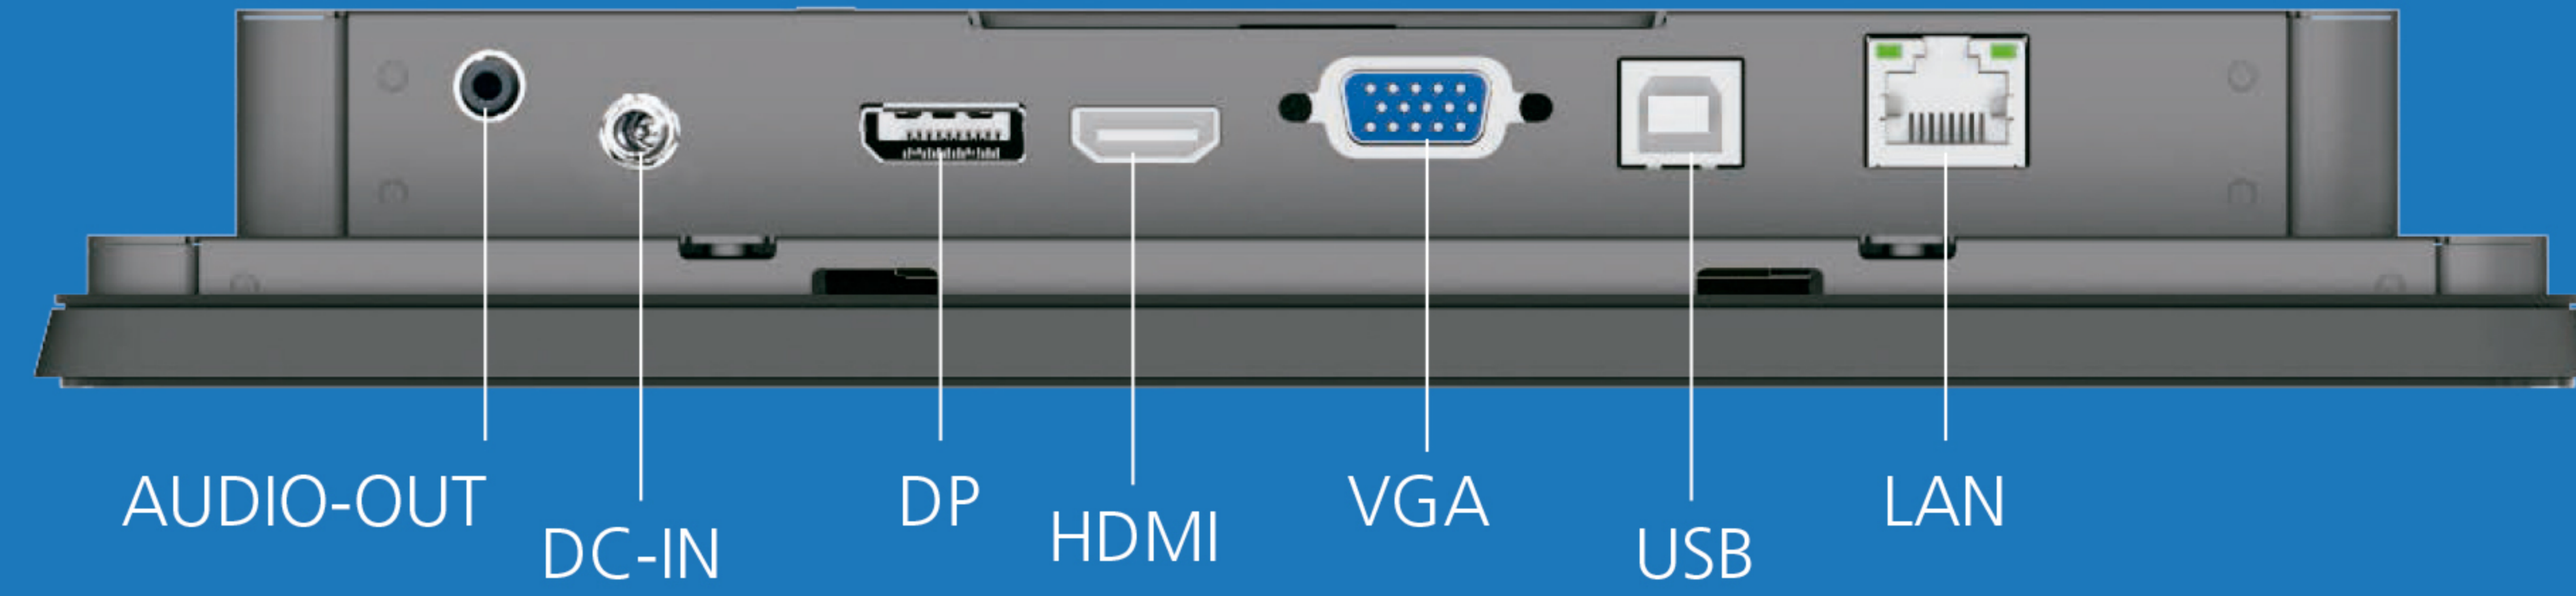

Bracket mount

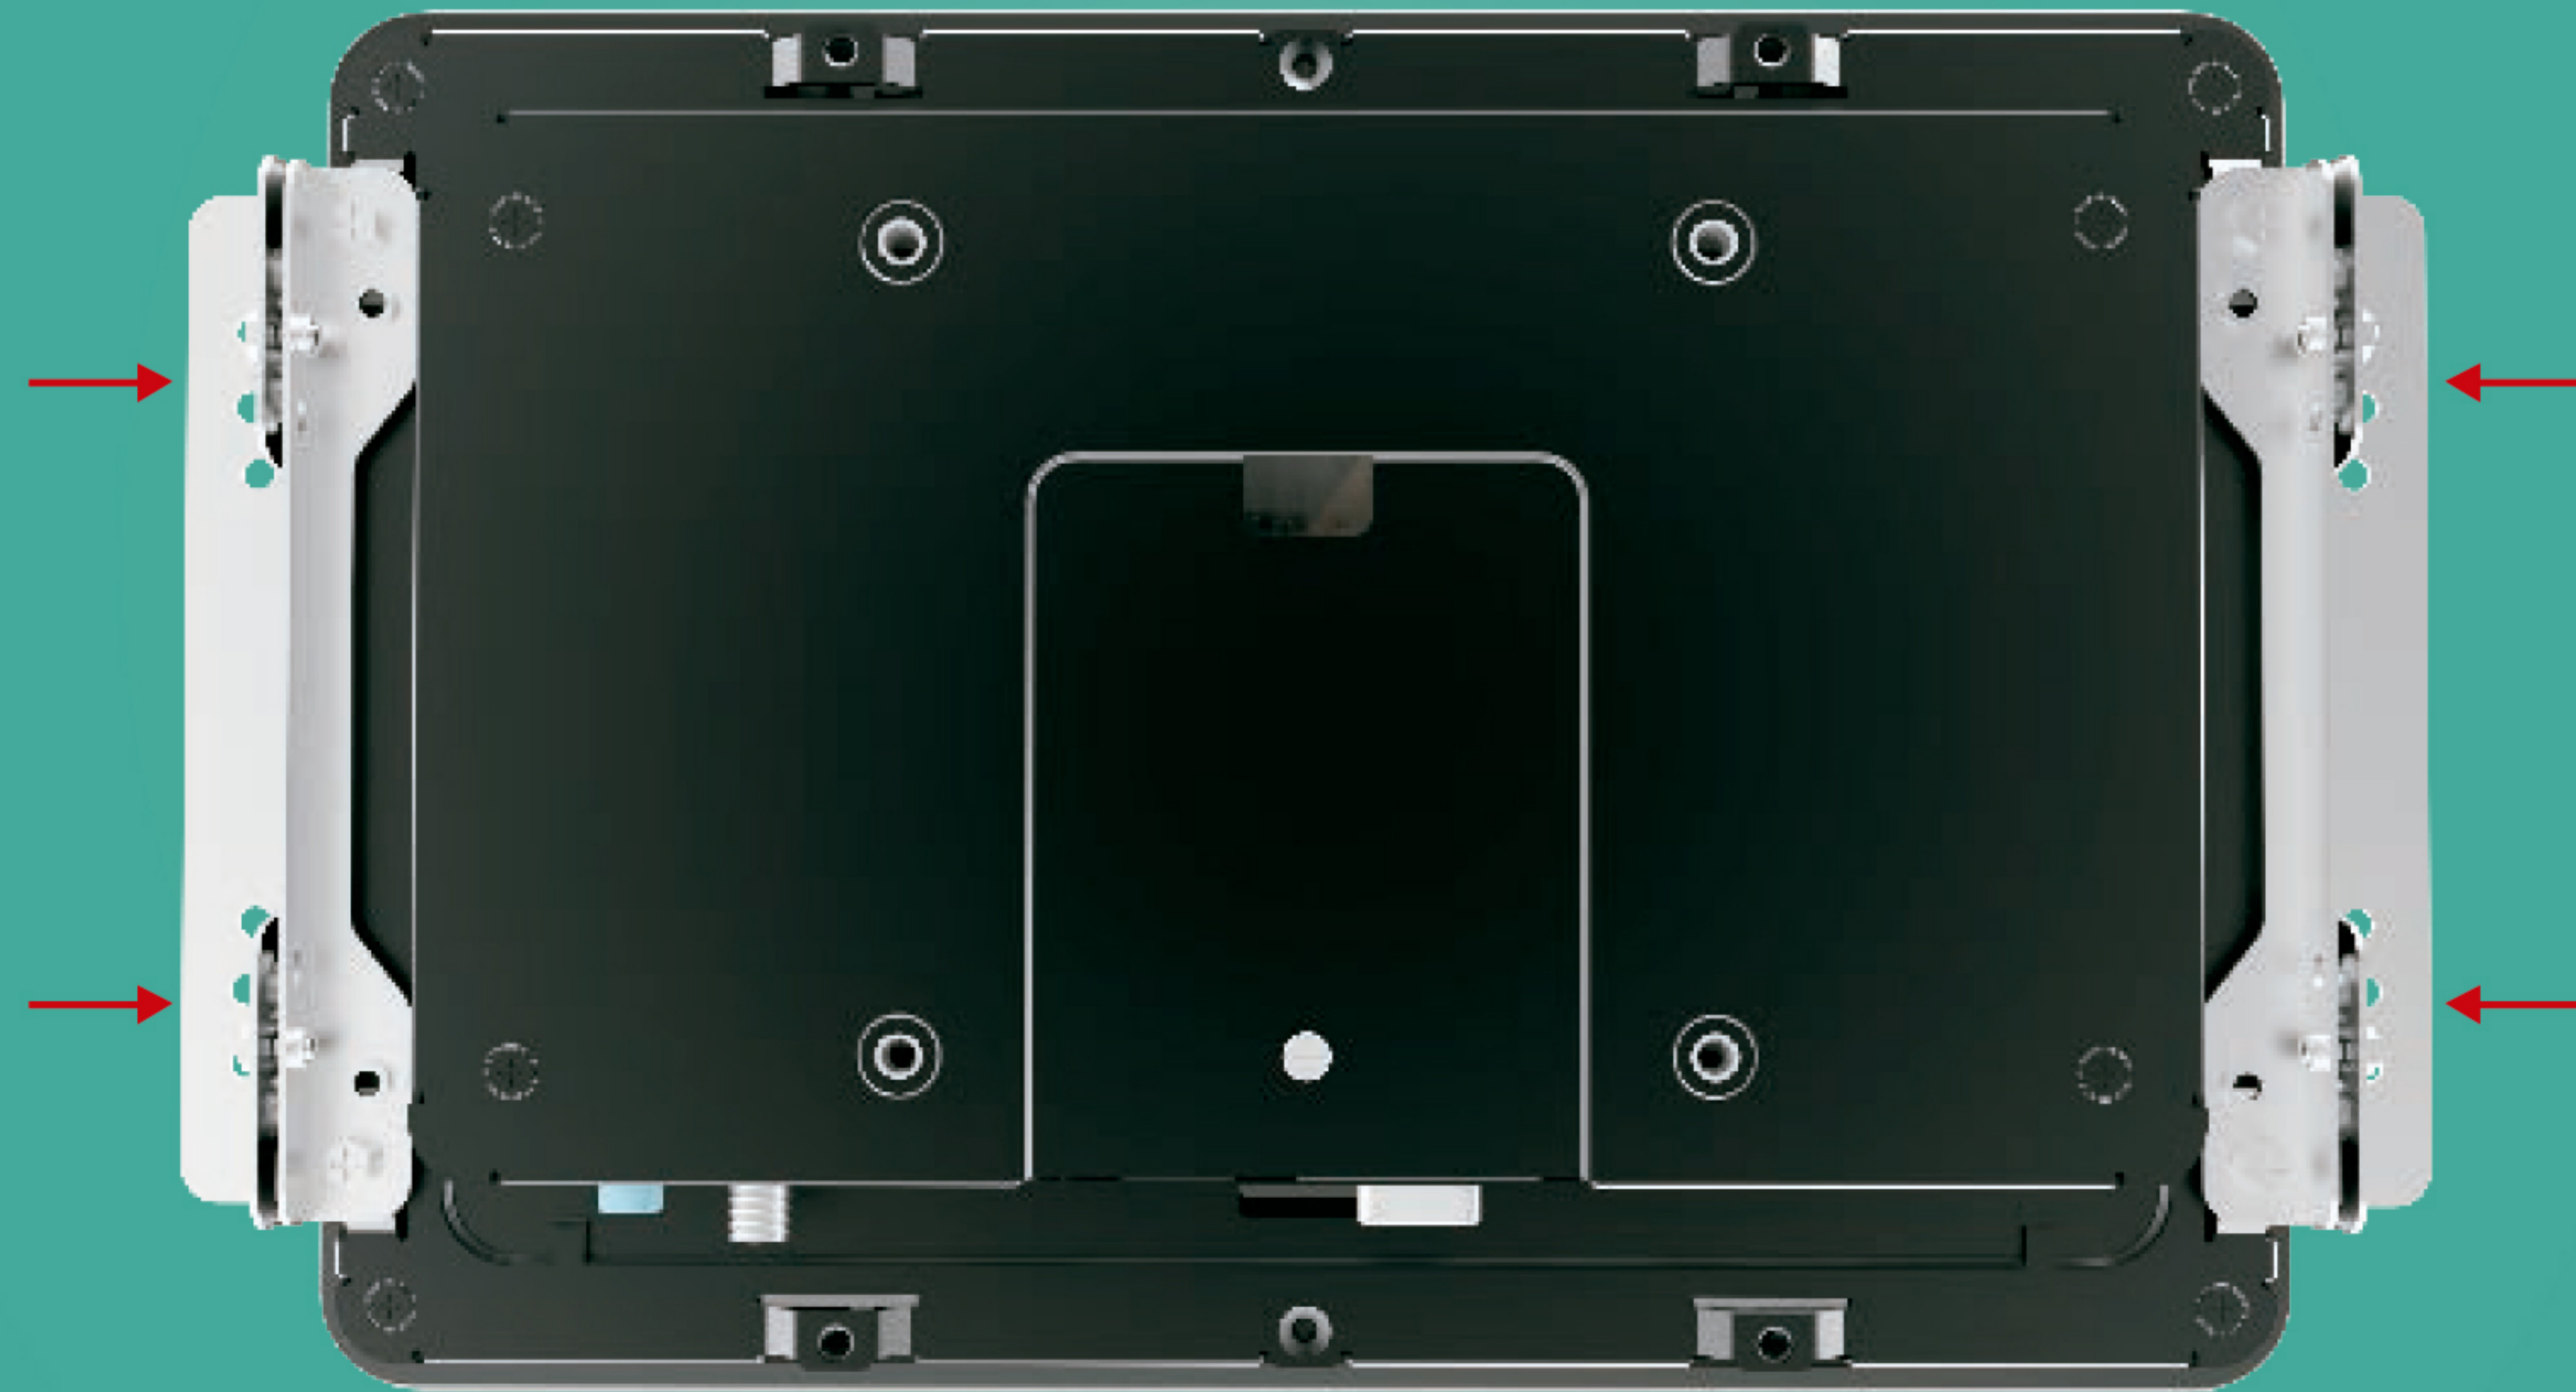

Slim design
Flat type



Specification

OFM-10

Size	10.1" TFT LCD
Maximum Resolution	1280 x 800
Contrast Ratio	1300:1
Brightness (Backlight Type)	500 nits (No Touch), 450 nits (Projected Capacitive)
View Angle	H:170°, V:170°

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)

IO ports

USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), DP x 1, HDMI x 1
Audio Port	Line-Out
Power Input	1 x 12V DC Jack with lock

Physical Properties

Power Supply	DC 12V with lock External Power
Housing Color	Black
Construction	Glass, Plastic (ABS), SECC Metal
Compliance	Front Side IP65 Compliant
Dimensions (W x H x D) mm	255.8 x 178.5 x 39.4
Net Weight (kg)	1.4 kg
Gross Weight (kg)	2.4 kg
Carton (W x H x D) mm	310 x 160 x 370
VESA	100 x 100 mm
Ball Drop	UL60950(500g/1.3m) and IK08

Safety

Certifications	CE, FCC Class B, CCC
----------------	----------------------

Environment

Operating Temperature	0°C ~ 50°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing

Optional Peripherals

Remote Key	1 x RJ45(for OSD connector)
------------	-----------------------------