

# SRP-330III

3-inch Thermal POS Printer



Retail



Restaurants  
& Bars




Ticketing



Kiosk

# Functional and Affordable

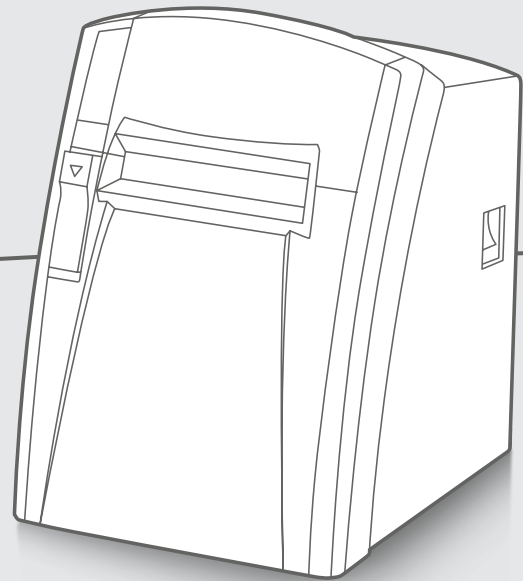

Triple Interface



Dual Interface

### Multiple Interface Choices

- All in one Plus™ Interface
- Triple Interface: USB V2.0 FS + Ethernet + Serial
- Dual Interface: USB V2.0 FS + Serial  
USB V2.0 FS + Parallel  
USB V2.0 FS + Dual Serial



### User-Friendly Design

- Auto media width switch with 2-inch (58 mm) partition
- Paper saving mode, reducing the length of a receipt up to 25%
- 180 or 203 dpi options

250  
mm/sec



### Reliable Printing Performance

- Fast printing speeds up to 250 mm/sec
- Energy Star certified

# SRP-330III

## 3-inch Thermal POS Printer

### Specifications

#### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

SRP-330III: Up to 250 mm/sec  
SRP-332III: Up to 250 mm/sec

**Print Resolution**

SRP-330III: 180 dpi  
SRP-332III: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Cover Open

#### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm  
Optional 58 mm

**Media Roll Diameter**

Up to 80 mm

**Media Thickness**

0.05 ~ 0.08 mm

**Supply Method**

Easy Paper Loading

#### Physical Characteristics

**Dimensions (W x D x H)**

145 x 195 x 146 mm  
(5.72 x 7.79 x 5.74 inch)

**Weight**

1.6 kg (3.52 lbs.)

**Electrical**

EnergyStar Certified,  
External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (Via y-type adaptor)

#### Performance Characteristics

**Memory**

128 Mb SDRAM, 64 Mb Flash

**NV Image Memory**

768 Kbytes (Mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

- ① USB V2.0 FS + Ethernet + Serial
- ② USB V2.0 FS + Serial
- ③ USB V2.0 FS + Parallel
- ④ USB V2.0 FS + Dual Serial

#### Environment Characteristics

**Temperature**

Operating: 0 ~ 40 °C (32 ~ 104 °F)  
Storage: -20 ~ 60 °C (-4 ~ 140 °F)

**Humidity**

Operating: 10 ~ 80 % RH  
Storage: 10 ~ 90 % RH

#### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver  
OPOS / JPOS Driver  
Linux / Mac CUPS Driver  
Virtual COM USB / Ethernet Driver  
Utility Program  
Network Auto Installer

**SDK / Plugin**

Android / iOS / Windows SDK  
Linux SDK  
Xamarin SDK  
Web Print SDK  
Cordova Plugin

**Application**

mPrint App (Android, iOS)

#### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24  
KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-330III: Font A: 42 Font B, C: 56  
KOR, CHN, JPN: 21

SRP-332III: Font A: 48 Font B, C: 64  
KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95  
Extended Graphics: 128 x 35 page  
International: 32

**Graphics**

Supporting user-defined fonts, graphics,  
formats, and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128, EAN-8,  
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

#### Accessories

**Standard**

2-inch Partition (58 mm), USB A-B Cable 1.8 m

**Optional**

External buzzer, B-Melodist,  
Serial Cable (9-9/25-9 pin), Parallel Cable

